




POWERVALUE 11 RT G2 6-10KVA

Model	PowerValue 11 RT G2 6-10kVA
Capacity (VA/W)	10KVA/10KW
UPS Type	On-line, transformer-free
Parallel capability	Up to 3 frames
Battery	Not included
Performance classification	VFI-SS-111
MECHANICAL	
Dimensions (width×height×depth) [mm]	438 x 86.5 x 573
Weight (with batteries)	15.0 kg
ACOUSTIC NOISE (acc. To IEC 62040-3)	
In normal mode (at <=25°C) at 100 / 50 % Load	<50 dBA
In battery mode (at <=25°C) at 100 / 50 % Load	<50 dBA
SAFETY	
Access	Operator
Degree of protection against hazards and water ingress	IP 20
ELECTROMAGNETIC COMPATIBILITY	
Compliant to IEC 62040-2	Yes
Category Emission / Immunity	C3
ENVIRONMENTAL	
Storage temperature range	-15°C – +60°C
Operative temperature range	0°C – +40°C
Storage (models with batteries)	0°C – +35°C
Relative humidity	≤95% (non-condensing)
Max. altitude without de-rating	1000m (above 1000m, 1% de-rating every 100m according to IEC/EN 62040-3)
ADDITIONAL AND USUAL INFORMATION	
Input connection	3 wires, 1 phase + N + PE
Output connection	3 wires, 1 phase + N + PE
Cable entry	Rear
Battery cable entry	Rear
Accessibility	Front only
Air outlet	Rear
INCLUDED (DEFAULT)	
Parallel Kit (parallel board pre-installed, parallel cable provided with each unit)	Included
Sea freight packaging (carton box)	Included
Back-feed protection	See manual



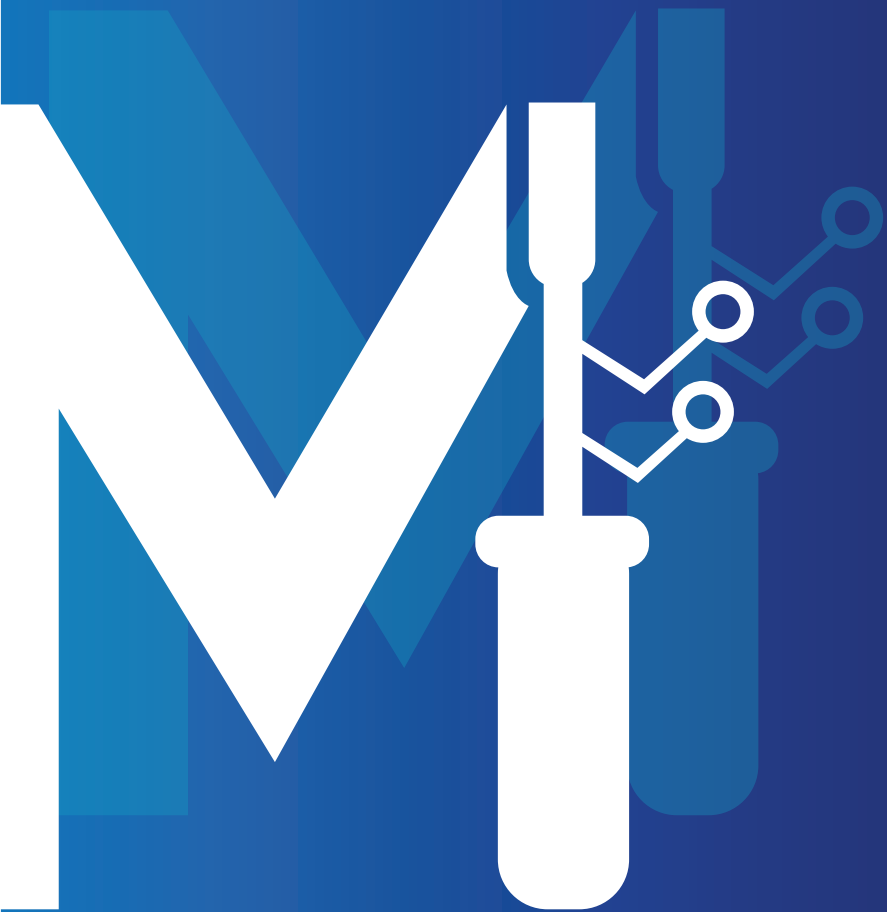

MAXENER SRL
EMPRESA DE ENERGÍA

Tel: 3988-7665

E-mail: mcarrizo@maxenersrl.com
info@maxenersrl.com

<https://www.maxenersrl.com.ar/>